FOR VERNON COUNTY, WISCONSIN


necessary. AE-7.08, Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, U.S. Public Land Survey Monument Record (3)(a)(b)(c)(d)(e)(f)(g)(h)(i). Use additional sheets , Chapter sheets if

(a) Sections 22

Township(s) 14 North, Range(s) 07. West.

Vernon County Coordinates: N 191939.647

Ш 622573.278




through lost corner proportionate methods, indicate all monuments, distances and directions used nothing was found, state evidence used as basis for establishing location and what was set. If re-established testimonial, occupational, plats records, other monuments) used as a basis for accepting. If not accepted or (b)(f)(h) Description of monument found at this corner and if it was accepted, state all evidence (material,

1846-1847 Alfred L of Section 22 Brown established the original corner location 40.0 chains north of the Southeast corner

witness ties as shown. a straight line proportionate method between the Northeast and Southeast corners December 16, , 1998 -Found the no evidence of an existing monument, re-established the corner location by of said section 22 and set

established corner, show the distances between the two corners and also indicate ties to disputed corner. (c)(d)(e) Plan view of corner with tes to at lest four (4) witness monuments. If in disagreement with previously

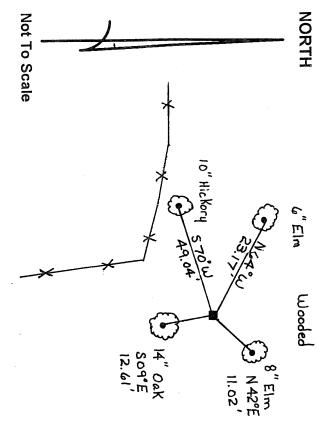

g 4 Corner Fence North line Hed intersection 4 appr

3 Placed Vernon County Monament

= Placed 60d spike

(I) Certify that the corner location on this recordwas determined by me or

Million Control of the

and belief Monument Record under my direction and control and that this U.S. Public Land survey <u>v</u> correct and complete to thebest of my knowledge

Carl M. Sandsnes December 31, 1998

Date

INDEX NO.

for record in Vernon County Surveyor's Office on

Filed

Signature